



POD

NDI® TO USB WEBCAM.



NDI® to USB Webcam. That's what it does.

Access any NDI® video and convert to a USB webcam. Connect to Zoom, Teams, Meet, and any conferencing or software application that supports a USB Webcam input.

Preliminary Specifications & Subject to Change. Coming soon.



4 buttons. Switch sources.

Use the soft-touch buttons, conveniently numbered 1 to 4, to switch between sources or to control 3rd party devices.



Automatic Source Detection.

Pod automatically scans your network for NDI® sources.



Grip Ring.

The non-slip rubberised grip ring stops the Pod from moving around.



ClickShare

Total Compatibility.

Pod is fully compatible with all USB UVC meeting applications including Zoom, Teams, Meet, as well as USB UVC hardware such as Barco ClickShare.

{RESTful API}



Q-SYS™

Zoom / API



CRESTRON

API Controls.


Pod supports API commands so you can build out the ultimate Zoom Room. Or Teams room. Or whatever room you like really.



Fanless Design.

Pod's hardware architecture keeps cool even in hot environments and requires no fans. Which makes it perfect for meeting spaces as it creates no noise.

POD Workflow Example

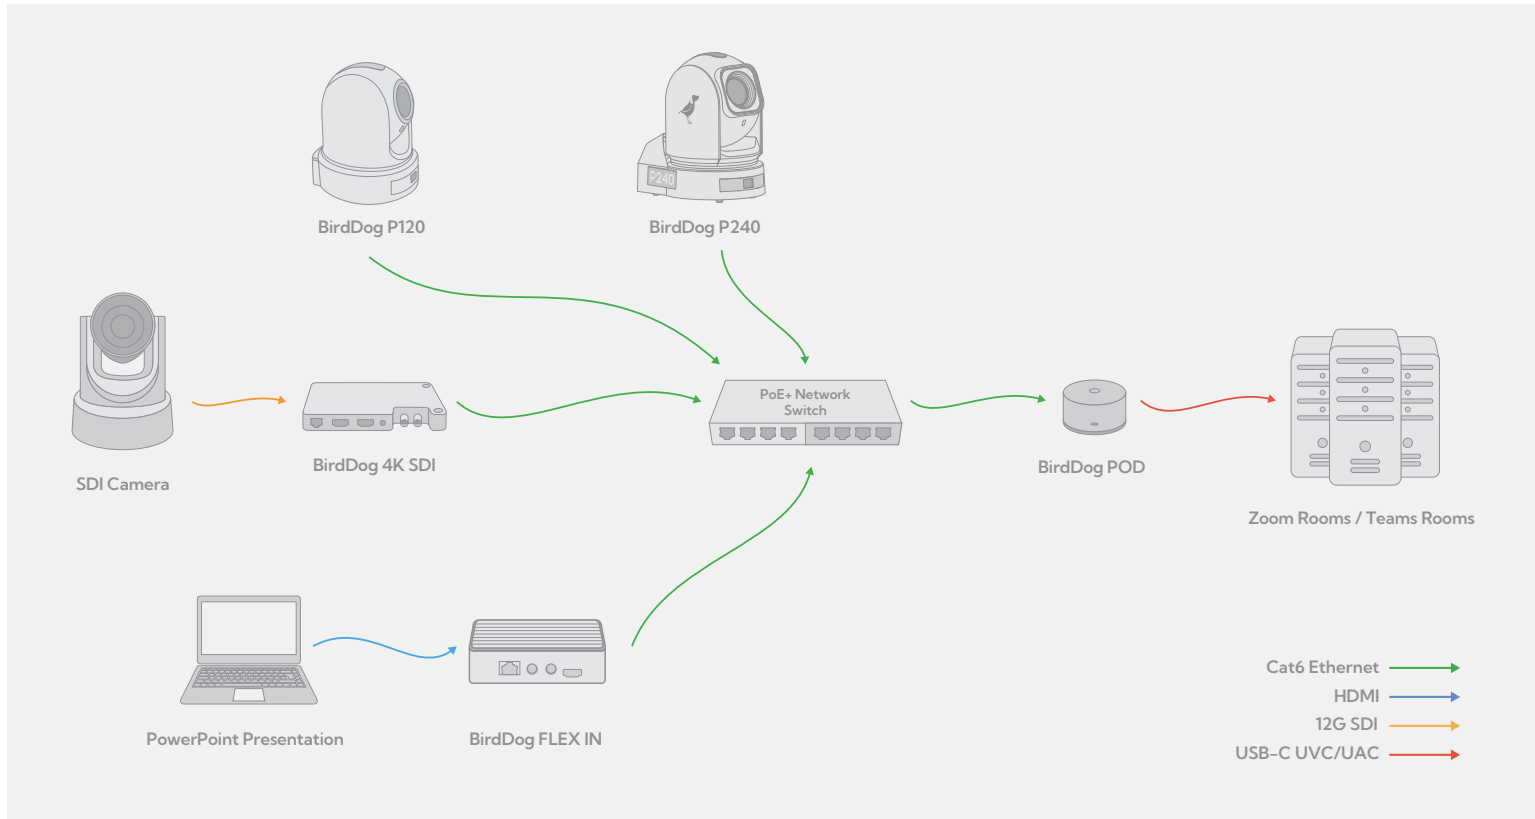

TECH SPECS	POD
RESOLUTIONS AND FRAME RATES	
HD 1080p	25, 29.97, 30, 50, 59.94, 60
HD 720p	50, 59.94, 60
VIDEO FORMAT SUPPORT	
NDI®	1080p60 in i-frame, low latency.
NDI® HX2	1080p60 in h.264
NDI® HX2	1080p60 in HEVC
NDI® HX3	1080p60 in h.264
NDI® HX3	1080p60 in HEVC
VIDEO OUTPUT SUPPORT	
USB-C	UVC – up to 1080p30
AUDIO OUTPUT SUPPORT	
USB-C	UAC
NETWORK CONNECTIVITY	
	Ethernet RJ45 1000baseT
POWER	
	PoE (802.11af)
MECHANICAL	
	4 programmable push buttons
	Multicolour Status LED

