

ATEM Micro Camera Panel



ATEM Micro Camera Panel is a portable camera panel with high end broadcast CCU controls. Control iris, pedestal, shutter, white balance, master gain, RGB balance and more for up to 8 cameras from a single panel. Connects to ATEM Software Control via Bluetooth or USB-C.



\$675

Connections

Computer Interface
USB Type-C.

Bluetooth
Bluetooth 5.1 LE

Software Updates
1 x USB-C for firmware updates.

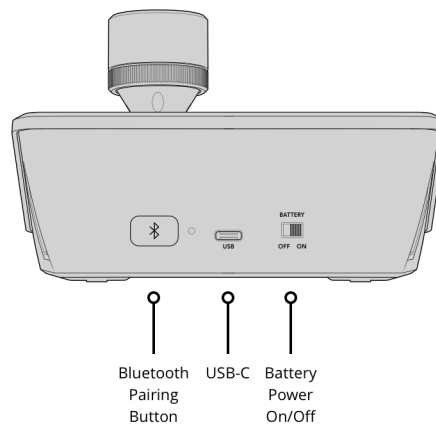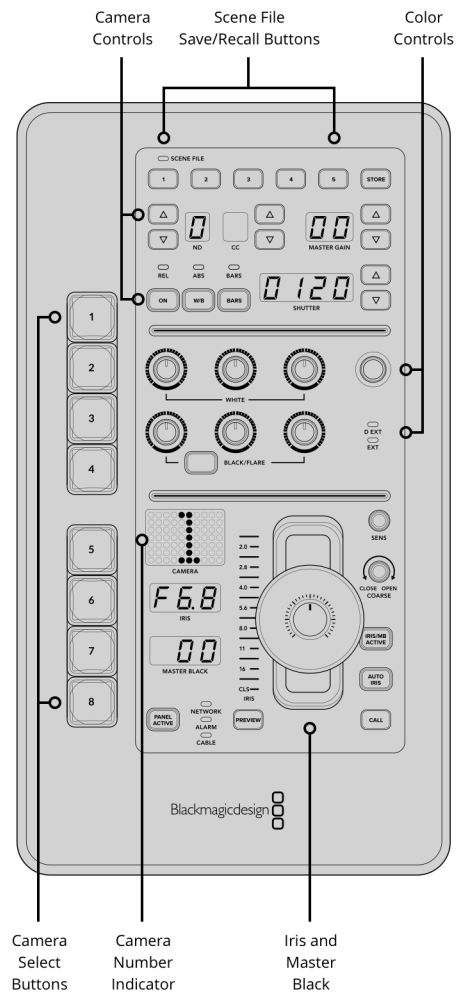

Product Specifics

Camera Selection buttons

8 x NKK buttons.
Assignable via setup utility.

Camera Number Display

Green off air, red on air.

Setup

White and black balance setup.
Flare via modifier key.

3 Axis Joystick 1	Gain Range -12dB to +32dB	Recallable Scenes 5 per camera.
Preview Button 1	ND Filters 0, 2, 4, 6.	Panel Active Protects settings.
Iris Control Auto Iris On, Coarse control.	Shutter Range 1/24 to 1/2000	
Iris Range CLS f32 to f1.2	White Balance Range 2500K to 10,000K	

Software

Software Applications

ATEM Micro Panel controls ATEM
Software Control Panel running on
the host computer.

Operating Systems



Mac 14.0 Sonoma,
Mac 15.0 Sequoia or later.



Windows 10 and 11.
Windows 11 for ARM

Power Requirements

Power Supply

Internal battery with power switch.
USB-C port for external power supply
and battery charging.

Power Usage

4 W max.

Battery Life

Minimum 3 hours.
(under normal use)

Physical Specifications



Environmental Specifications

Operating Temperature	Storage Temperature	Relative Humidity
5° to 40° C (41° to 104° F)	-20° to 45° C (-4° to 113° F)	0% to 90% non-condensing

What's Included

- ATEM Micro Camera Panel
 - Welcome wallet with QR code for software download
 - 1 x USB-C cable
-

Warranty

1 Year Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller