

# Blackmagic URSA Studio Viewfinder G2



When you're working live in the studio or out at an event in a large venue such as a stadium, the URSA Studio Viewfinder G2 gives you everything you need to comfortably operate your URSA Mini in live production! The bright 7" screen has a detachable sunshade and includes large handles and an articulated pivot mount that let you position and move the viewfinder independent of the camera! The large rotary control dials and customizable function buttons let you make on the fly adjustments without having to take your eyes off the action! Set up is quick and easy using the included V-Lock plate and it connects directly to the SDI monitor and power output on your URSA Mini, so you don't need additional cables or power supplies.

\$1,669

## Connections

### SDI Video Input

1 x BNC.

### SDI Rates

1.5G, 3G.

### Power Input

1 x 4 pin XLR 12V.

### Screen Dimensions

7" 1920 x 1200 resolution.

### Screen Type


7" high brightness TFT LCD

### Screen Brightness

2000 nits

### Computer Interface

1 x USB type C connector for initial setup and software updates via Blackmagic Camera Setup software.

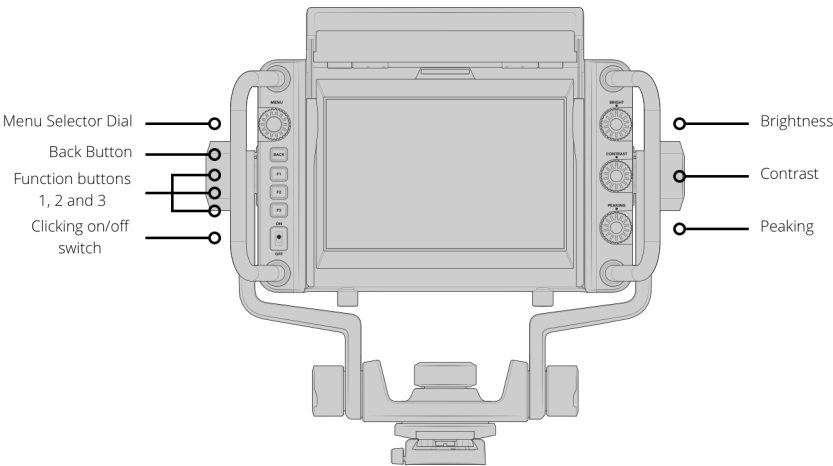

---

## SDI Video Standards

### HD Format Support

720p50, 720p59.94, 720p60  
1080p23.98, 1080p24, 1080p25,  
1080p29.97, 1080p30, 1080p50,  
1080p59.94, 1080p60  
1080i50, 1080i59.94, 1080i60

### SDI Compliance

SMPTE 259M, SMPTE 292M,  
SMPTE 296M, SMPTE 425M 2084.

### Video Sampling

4:2:2 YUV.

### Color Precision

10-bit.

### Color Space

REC 601, REC 709.

### Multiple Rate Support

SDI switches between 1.5 Gb/s HD  
and 3.0 Gb/s 60P HD.

---

## Monitor Features

### Controls

Dial, knobs and customizable  
function buttons for settings, short  
cut features and navigating menus.

### Handles

Built in grab handles for positioning  
the monitor independently from  
the camera.

### Position Adjustment Options

Variable tension pivot points for  
articulated arm and grab handles  
with forward, backward, up, down,  
pan and tilt adjustments.

### Mounting Options

Quick release V-lock mounting  
bracket for attaching viewfinder to  
URSA Mini handle.

### Tally

Large LED tally light with  
customizable perspex  
camera numbers.

### Metadata Support

Detects camera information  
embedded in the SDI signal including  
status information, frame guides,  
focus peaking, tally, and more.

### Screen Interface

On screen meters and status  
information including Camera ID,  
resolution, frames per second,  
shutter speed, gain, white balance,  
camera battery level, and more.

---

## Operating Systems



Mac 13.0 Ventura,  
Mac 14.0 Sonoma or later.



Windows 10 and 11.

---

## Power Requirements

12V power input via 4 pin XLR connected via URSA Mini 12v power output.

Physical Specifications



Environmental Specifications

|                                                             |                                                             |                                                      |
|-------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------------|
| <b>Operating Temperature</b><br>0° to 40° C (32° to 104° F) | <b>Storage Temperature</b><br>-20° to 60° C (-4° to 140° F) | <b>Relative Humidity</b><br>0% to 90% non-condensing |
|-------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------------|

What's Included

Blackmagic URSA Studio Viewfinder G2

Warranty

1 Year Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller