

ATEM 1 M/E Advanced Panel 20



The ATEM 1 M/E Advanced Panel 20 is a single M/E, 20 input button switching panel that includes the features and flexibility needed for switching big and small productions in a highly portable and compact design. It has 2 independent system control LCDs plus it can control up to 4 M/Es in larger switchers. All input buttons include LCDs for custom labeling and there is an independent select bus. Dual power inputs provide redundancy and the built-in 4 port Ethernet switch means no additional network equipment is needed so it will fit even the most challenging live production spaces!

\$4,279


Connections

Ethernet

4 x 10/100/1000 BASE-T with loop output for additional control panels or computers.

Software Updates

1 x USB-C for firmware updates.

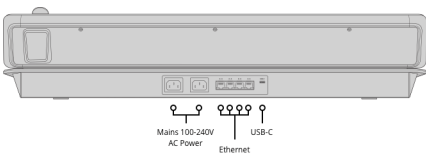

Product Specifics

Number of Mix Effects Rows 1	Preview Transition 1	Dedicated Macro Buttons 1 x 20
Direct Cross Points 20	Transition Rate Displays Via main menu	Transport Control Buttons 8
Shifted Cross Points 40	LCD Menu Displays 2	Destination Bus 1
Crosspoint Button Type Tri-Color LED	Menu Control 2 x 20 buttons	Source Select Bus 1

Fader Bar	3 Axis Joystick	Numeric Keypad
1	1	1

Software

Software Applications
ATEM Software Control Panel.

Operating Systems



Mac 14.0 Sonoma,
Mac 15.0 Sequoia or later.



Windows 10 and 11.

Power Requirements

Input Voltage	Redundant Power	Power Usage
2 x Internal 100 - 240V AC.	Yes	75W

Physical Specifications



Environmental Specifications

Operating Temperature	Storage Temperature	Relative Humidity
0° to 40° C (32° to 104° F)	-20° to 60° C (-4° to 140° F)	0% to 95% non-condensing

What's Included

ATEM 1 M/E Advanced Panel 20
Welcome wallet with QR code for software download

Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller